MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE **electric** (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 **ENERGY AND AUTOMATION** CONTACTORS, 4...6.5A



Product designation			Motor protection relay
Product type designation			RF38
General characteristics			
Number of poles		nr.	3
Overvoltage category			
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse			
	gG (IEC)	Α	16 A
	aM (IEC)	Α	8 A
	RK5 (UL)	Α	25 A
Phase failure detection			NO
Reset mode			Manual or
			automatic
Power circuit characteristics			
Operating frequency			
	Operational frequency max	Hz	400 1/s
Operating current			
	Operational current min	Α	4 A
	Operational current max	Α	6.5 A
Tripping class			10A
Test Button			YES
Trip indicator			YES
Terminals			
	type		Screw and
	турс		washer
	screw		M4
	tool		Phillips 2
Conductor section			
	AWG max		8
Auxiliary circuit characteristics			
Auxiliary contacts			
	NO	nr.	1
	NC	nr.	1
Operating current AC15			
	24V	Α	3 A
	120V	Α	3 A
	240V	Α	1.5 A
	380V	Α	0.95 A
	480V	Α	0.75 A
	500V	Α	0.72 A
	600V	Α	0.6 A

Operating current DC13



ENERGY AND AUTOMATION

MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE **electric** (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 4...6.5A

	125V	Α	0.11 A
	600V	Α	0.22 A
Conventional free air thermal current Ith		Α	10 A

-	_			
	ı erı	വ	na	ıle
	- C11	1111	110	lio.

Tommalo			0
	type		Screw and washer
	screw		M3,5
	tool		Phillips 2
UL/CSA and IEC/EN 60947-5-1 designation			B600-R300
Ambient conditions			
Max altitude		m	3000

Mechanical feautures


Operating position

	normal allowable		Vertical plan ±30°
Weight		g	0.16 kg
UL technical data			

Full-load current (FLA) for three-phase AC motor

6.5 A at 480V Α at 600V Α 6.5 A

Wiring diagrams

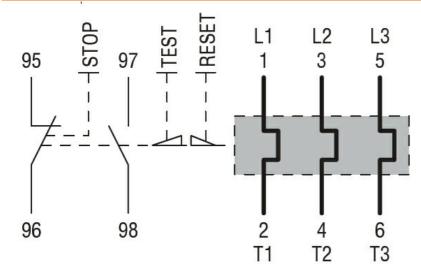

Certifications and compliance

<u> </u>		1			_
Co	m	nı	12	nca	2

CSA C22.2 n° 14	
IEC/EN 60947-1	
IEC/EN 60947-4-1	
UL508	

Certifications

CCC			
cULus			
FAC			