

# ASTRO G2 LED FLOOD LIGHT



PF>0.9

CE

IP65

IK08

LONG LIFE  
50000h




## Features

- Die cast Aluminum (ADC12) housing with corrosion resistant powder coated finish.
- Impact resistant PC lens.
- High output LED chip with lumen efficiency of upto 130lm/W.
- Input voltage range 165-265VAC, works well even at low voltages.
- SMD 2835 LED chip with CRI>80 SDCM<6 for excellent lighting performance
- Five frame sizes covers from 30W to 300W.
- Long life >50000 hrs @L70 certified LED chip.
- Adjustable bracket
- IP65, IK08, Class I protection rating.
- Operating Temperature -20°C to + 50°C, suitable for extreme hot and cold environment.

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) 6500K
CLS-ASTROG2-30W	30	165-265 VAC 50/60 Hz	>0.95	3000K / 4000K / 6500K	3900
CLS-ASTROG2-50W	50				6500
CLS-ASTROG2-100W	100				13000
CLS-ASTROG2-150W	150				19500
CLS-ASTROG2-200W	200				26000
CLS-ASTROG2-300W	300				39000

## Dimensions (mm)

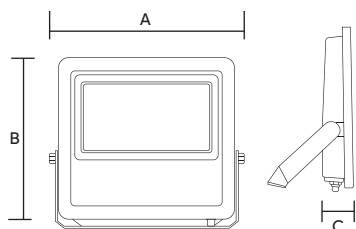

WATTS	A mm	B mm	C mm
30	169	140	29
50	202	167	31
100	260	225	34
150	345	291	38
200	345	291	38
300	400	331	49

