




# TUBO PRO

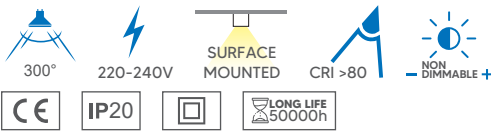

## Features

- Unique design with big beam angle and perfect light distribution.
- Seamless connectivity
- 1.5mm thick Aluminum heat sink keeps the temperature low and provide excellent heat dissipation.
- Built In surge protection on driver.
- Fully opaque smooth PMMA diffuser with no LED's visible.
- High efficiency SMD 2835 LED chip.
- Integral LED driver.
- Operating temperature -20°C to +40°C.

## Applications

- Cove Lighting
- General lighting of service areas like elevator tunnels, corridors, stair case, washrooms, kitchens and storage etc.

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) @4000K	DIMENSIONS (mm)
TUBOPRO-10W	10	220 -240 VAC	>0.9	3000K / 4000K / 5000K	1000	595 X 35 X 20
TUBOPRO-18W	18	220 -240 VAC	>0.9	3000K / 4000K / 5000K	1800	1164 X 35 X 20

## Dimensions

