




## POWERWALL - IP20 25.6V 100Ah W3-5A

**5 Years Warranty**

**6000+ Cycles**

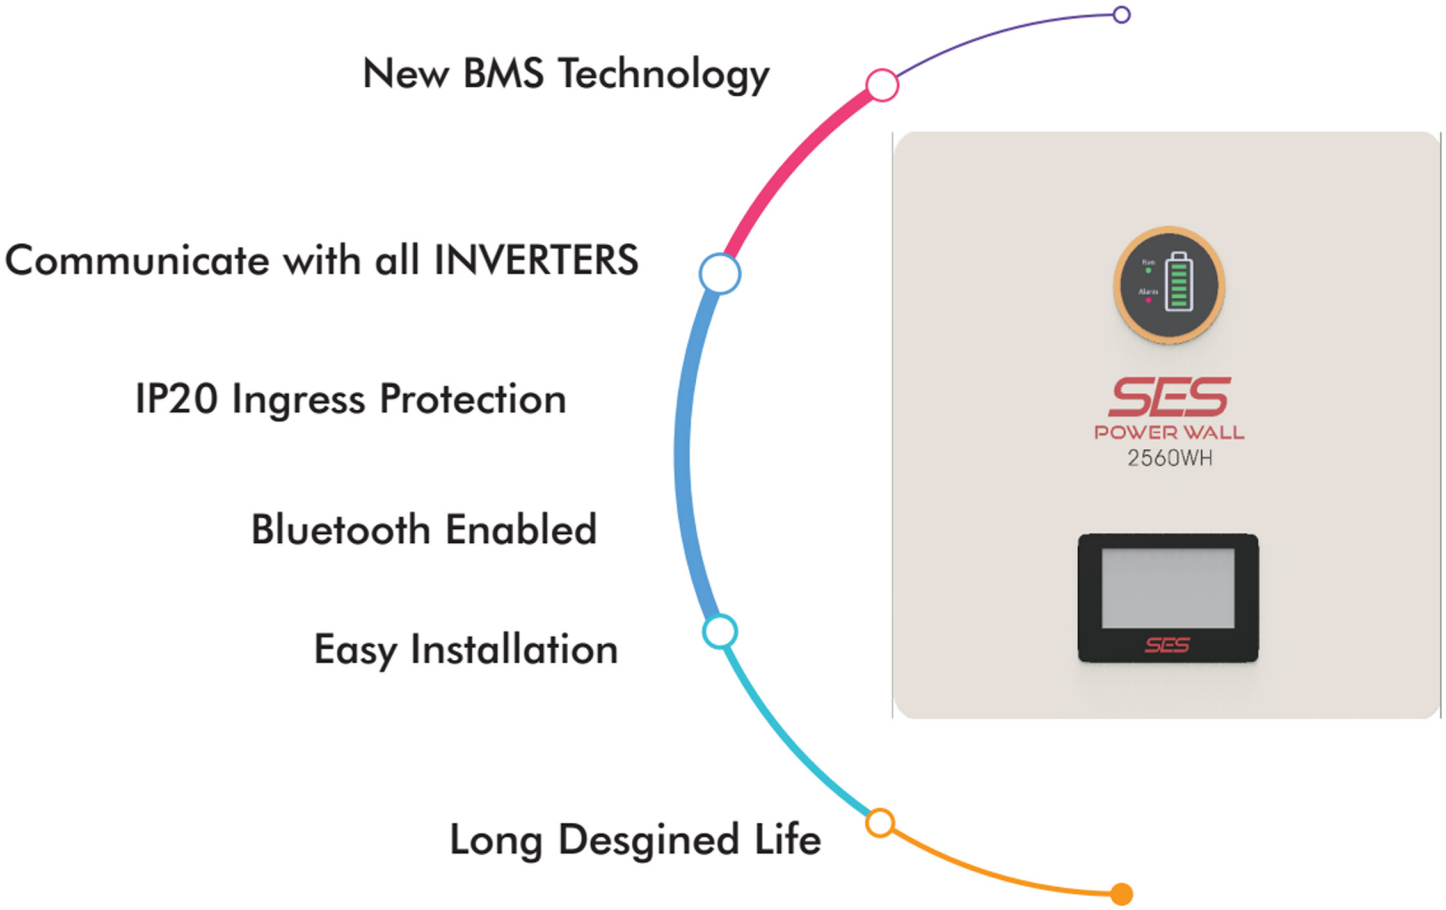

## Specifications

BATTERY SPECIFICATION		
Rated Voltage	25.6V	
Rated Capacity	100Ah	
Rated Capacity - WATTS	2560WH	
Discharge Current (Max.)	100A	
Discharge End Voltage	22.8V	
Charge Current (Recomm.)	20A ~ 50A	
Charge Current (Max.)	100A	
Charge Voltage	26.68V	
Dimensions	Width	403 mm
	Depth	396 mm
	Height	145 mm
Typical Weight	26.68 Kg	
Ports		
Status Indicators	SOC / ALM / RUN	
Communication Ports	CAN / RS485	
Communication in Parallel	Max 8 modules in parallel	
Reset Key	Available	
Terminal Size	M8 (Screw size)	
LCD Screen	N/A	
Operation Environments		
Temperature Range	Discharge	-20 to + 60 °C
	Charge	0 to + 60 °C
	Storage	0 to + 40 °C
Temperature Recommendation	Discharge	+15 to + 35 °C
	Charge	+15 to + 35 °C
	Storage	+15 to + 30 °C
Humidity	5% to 95%	
Warranty: 5 Years Complete Warranty + 3 Years Free Service		

## W3-5A



**25.6V 100Ah**  
**6000+ Cycles**  
**5Years Warranty**