

AUSTUBE ECO RECESSED



110°
 220-240V
 RECESSED MOUNTED
 CRI >80
 NON DIMMABLE+
 DIMMABLE UPON REQUEST+

CE
 IP20
 LONG LIFE 55000h

Features


- Strong modern aluminum housing, Excellent finish.
- 220-240VAC non-dimmable Isolated external driver as standard, TRIAC, Analog 0-10V and DALI dimmable options available upon request.
- Glare free PMMA opaque diffuser standard with 110° beam angle.
- 3000K, 4000K, 6000K for option.
- High efficiency SMD 2835 LED chip.
- Life time 50000hrs @L70.

Applications

- General office areas
- Receptions
- Foyers.
- Retail outlets
- Shops
- Multi purpose halls

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) 3000K / 4000K / 6000K	DIMENSIONS (mm)	CUTOUT (mm)
AUSTUBE-R-40W	40	110 -240 VAC	>0.9	3000K / 4000K / 6000K	3840 / 4000 / 4100	1231 X 84 X 51	1125 X 68

Dimensions

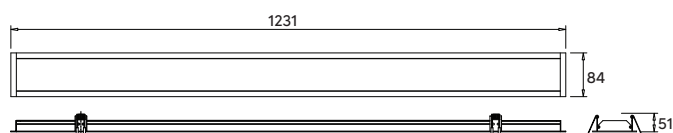

Photometrics

