



AUSTUBE ECO

SURFACE / SUSPENDED



120°
 220-240V
 SURFACE MOUNTED
 SUSPENDED MOUNTING
 CRI >80
 NON DIMMABLE
 DIMMABLE UPON REQUEST

Features


- Strong modern aluminum housing, Excellent finish.
- 220-240VAC isolated driver built-in.
- Glare free PMMA diffuser.
- Seamless connectivity of upto 8 fixtures through linear connector accessory.
- Suspension kit, Ceiling surface mounted fitting available.
- 3000K, 4000K, 6000K for option.
- Lifetime 50,000hrs @L70.
- High efficiency SMD 2830 LED chip.
- Certified LED driver. Integral non-dimmable as standard.
- TRIAC dim, Analog dim and DALI dim drivers available upon request.

Applications

- General office areas
- Board rooms
- Receptions / Counters
- Retail outlets
- Showrooms
- Multi purpose halls

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) 3000K / 4000K / 6000K	DIMENSIONS (mm)
AUSTUBE-S-20W	20	110 -240 VAC	>0.9	3000K / 4000K / 6000K	1860 / 2000 / 2000	614 X 64 X 75
AUSTUBE-S-40W	40				3720 / 4000 / 4000	1217 X 64 X 75

Dimensions

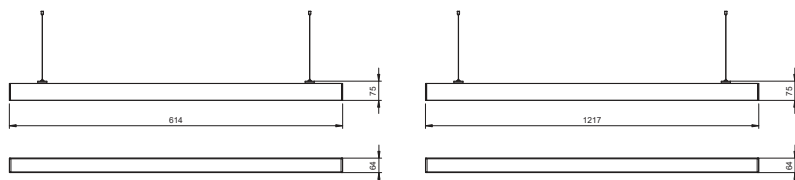

Photometrics

