




CANOPY LED LIGHT

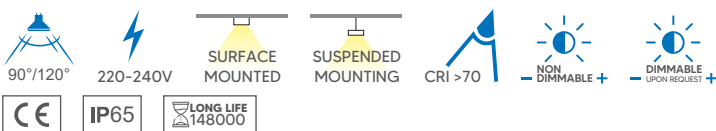

Features


- Simple and stylish design
- ADC 12 Die cast Aluminum housing with tempered glass front cover.
- Excellent heat dissipation ensuring reliable and long life operation.
- Certified LED driver
- Operating Temperature -30o to 50oC
- High efficiency 150lm/W LED Chip.
- Multiple installations: Surface mount, G 3/4 Conduit mount and mount with adapter plate.
- IP65 & IK08 protection rating.

Applications


- Gas station
- Underground Parking Lot
- Warehouse
- Industrial Facility
- Exhibition Centre
- Shopping Mall
- Toll Station
- Pharmaceutical Warehouse

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) @4000K	DIMENSIONS (mm)	WEIGHT (kg)
LED-CANOPY-60W	60	220-240 VAC	>0.9	4000K (Optional 3000K / 5000K)	9000	369.5 x 368.5 x 65	4.63 ± 0.3
LED-CANOPY-75W	75				11250		
LED-CANOPY-100W	100				15000		
LED-CANOPY-120W	120				18000		

Dimensions

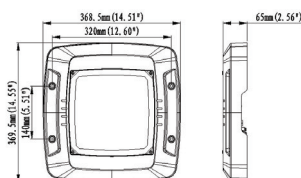

Mounting Options

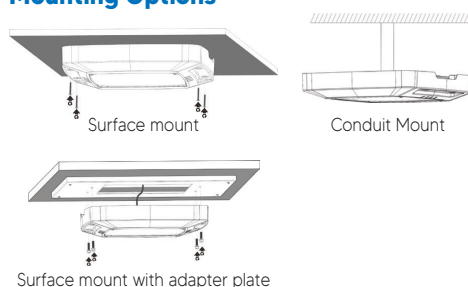

Photometrics

