




DECK LIGHT

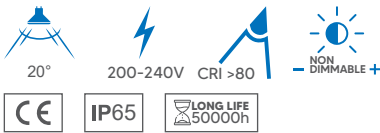


Features

- Body and bracket in oxydized Aluminium
- Tempered clear glass
- Silicon rubber gasket
- LED driver certified by Intertek
- 200V-240V, 50Hz



CODE	WATTS (W)	INPUT VOLTAGE	BEAM ANGLE	COLOR TEMPERATURE	LUMENS (lm) 3000K	DIMENSIONS (mm)
P2101-COB	1	200-240 VAC	20°	3000K	72	Ø40 X 50

Dimensions



Photometrics

