



ECO DOWNLIGHT



38°



45°



100-240V



IP20



NON DIMMING



50000h




Features

- Aluminium profile for good heat dissipation.
- Color temperatures 3000K, 4000K and 6000K
- Working Temperature: -20°C ~ 40°C.
- Built-in Driver.
- Warranty: 1 year
- Rated life 30,000 hours


Applications

Interior retail, display, residential, commercial applications where lamp quality, reliability and performance is essential, in particular locations such as public spaces, reception areas, hotels and health sectors.


CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm)	DIMENSIONS (mm)	CUTOUT (mm)
					3000K / 4000K / 6000K		
CLS-EDL-7W	7	100-240 VAC	>0.5	3000K / 4000K / 6000K	500 / 525 / 550	Ø90 X 45	Ø70-75
CLS-EDL-12W	12				1000 / 1050 / 1090	Ø120 X 50	Ø90 - 95
CLS-EDL-18W	18				1400 / 1435 / 1460	Ø144 X 55	Ø120 - 125

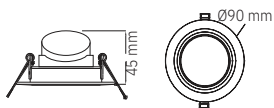

Ø70-75 mm

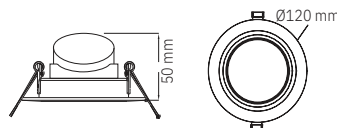

Ø90-95 mm

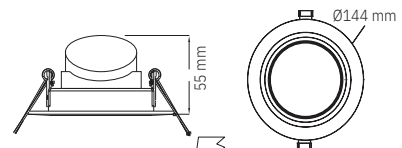

Ø120-125 mm



30°