



HIGHBAY LIGHT
ELEVA ECO GEN-2



Highbay Light	SUSPENDED	AC 100-240V	90°/120°	CRI≥80	NON DIMMABLE	DIMMABLE upon request
PF≥0.9	IP65	RoHS	CE	CB		LIFE 125000 HOURS

FEATURES

- Die cast Aluminum housing with PC lens.
- Cover gasket- Hypalon synthetic rubber.
- Special powder coated AKZO finish available for robust environment.
- Large size, light weight body provides excellent heat dissipation.
- Built-in upto 6kV surge protection.
- 160lm/W high efficiency SMD 2835 LED chip.
- IP65 & IK08 double protection.
- Loop hanging / ceiling mounted options.
- 90° / 120° symmetric beam angles.
- Operating temperature -30° to 55°C.
- Certified LED chip and driver ensuring reliable performance.


APPLICATIONS

- Industrial facilities
- Manufacturing facilities
- Metallurgical industries
- Textile Industries
- Refineries
- Tanneries
- Warehouses
- School and university
- Gymnasiums
- Municipal facilities like community centers recreation centers, exhibition halls
- Departmental stores and shopping malls.


SPECIFICATIONS

CODE	WATTS (W)	CCT (K)	LUMENS (lm)*	DIMENSIONS (mm)
			4000K/5000K/6000K	A X B
ELEVAECOG2-100W	100	4000K /	15800 / 16000 / 16200	Ø251 X 174
ELEVAECOG2-120W	120	5000K /	18960 / 19200 / 19440	Ø251 X 174
ELEVAECOG2-150W	150	6000K	23700 / 24000 / 24300	Ø271 X 182
ELEVAECOG2-200W	200		31600 / 32000 / 32400	Ø340 X 184


*Lumen output with ±10% tolerance.

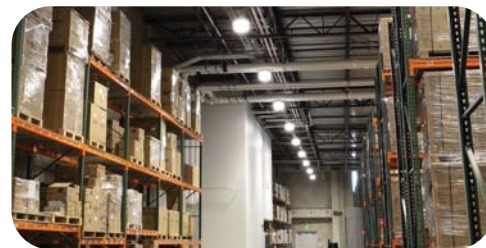

DIMENSIONS



ACCESSORIES



PHOTOMETRICS

