


ELITE LED PANEL

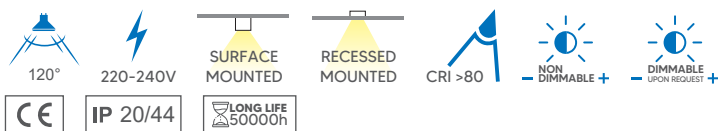

Features


- Aluminum frame with no junction gap.
- Certified non-dimmable LED drivers as standard. Dimmable TRIAC, Analog and DALI drivers available upon request.
- Edge lit with PMMA LGP
- Wide beam angle with broad uniform light distribution
- Ideal for ceilings with limited space
- Resistant to vibration and impact
- Advantage for use with sensors, no negative impact on the light source
- Energy efficient (>100 lm/W delivered at 4000K).
- Operating Temperature -20 C to 40 C
- Relative Humidity 0-80%
- Recessed, surface and pendant mounting options.

Applications

General Lighting of Offices, Retail outlets, Healthcare facilities, Educational Institutes, Recreational and hospitality projects and Industries.

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) 3000K / 4000K / 6000K	DIMENSIONS (mm)
PNL-ELITE-1X1-12W	12	220 -240 VAC	>0.9	3000K / 4000K / 6000K	1080 / 1230 / 1260	295 X 295 X 9.6
PNL-ELITE-1X2-18W	18				1620 / 1850 / 1890	295 X 595 X 9.6
PNL-ELITE-2X2-40W	40				3850 / 4060 / 4150	595 X 595 X 9.6
PNL-ELITE-1X4-40W	40				3800 / 4030 / 4160	295 X 1195 X 9.6

Dimensions

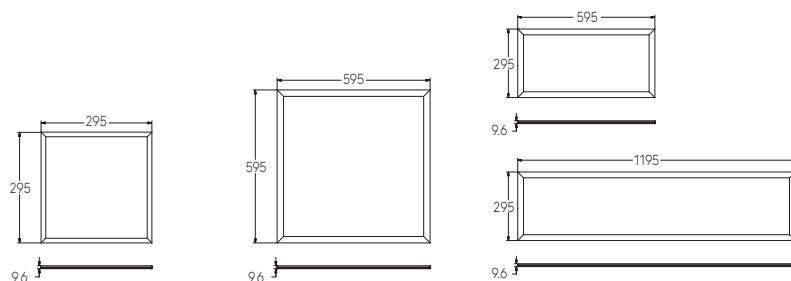

Photometrics

