




ERGO LED DOWNLIGHT

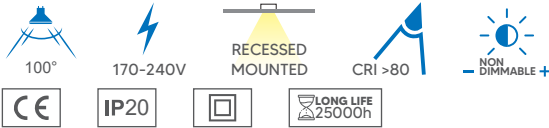

Features

- Slim and elegant design.
- Easy installation and maintenance.
- Integrated driver built-in.
- Milky diffuser for comfortable and pleasant light effect.
- Wide beam angle providing maximum coverage with excellent uniformity.
- Provides good heat dissipation with built-in Aluminum profile and thermal conductive plastic housing that ensures safety.
- Ideal for low depth ceilings and compact spaces.

Applications

Interior retail, Displays, Residential Commercial applications where lamp quality, reliability and performance is essential, in particular locations such as public spaces, reception areas, hotels and health sectors.

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) 3000K / 4000K / 6500K	DIMENSIONS (mm)	CUTOUT (mm)
CLS-ERG-7W	7	170-240 VAC	>0.5	3000K / 4000K /	560 / 600 / 630	Ø109 X 32	Ø85-95
CLS-ERG-12W	12			6500K	960 / 1000 / 1080	Ø129 X 32	Ø105-115

Dimensions

