



LED HIGHBAY LIGHT
THUNDER G3



HIGHBAY LIGHT

SUSPENDED

AC
100-240V

60°/
90°/120°

CRI≥80

NON
DIMMABLE

DIMMABLE
upon request

PF≥0.9

IP65

IK08

RoHS

CE

⏻

⏳
LIFE
128000
HOURS

FEATURES

- ADC 12 die-cast Aluminum housing with PC lens.
- Powder coated external finish.
- Tool less interchangeable lens design providing flexibility for different lighting demand.
- Wide and flat structure ensuring better heat dissipation.
- Smooth outer rim, easy to clean.
- 6KV Surge Protection.
- High efficiency 165lm/W LED chip.
- Operating voltage 100-240VAC, 50/60Hz.
- Certified flicker free driver and LED chip ensuring reliable performance.
- IP65 & IK08 double protection.
- Loop hanging / ceiling mounted options.
- 90° symmetric beam angle standard. 60° and 120° lens options available upon request.
- Operating temperature -30° to 45°C.

APPLICATIONS

- Industrial facilities
- Manufacturing facilities
- Metallurgical industries
- Textile Industries
- Refineries
- Tanneries
- Warehouses
- School and university
- Gymnasiums
- Municipal facilities like community centers recreation centers, exhibition halls
- Departmental stores and shopping malls.


SPECIFICATIONS

| CODE | WATTS (W) | CCT (K) | LUMENS (lm)* | DIMENSIONS (mm) |
|----------------|--------------|------------|--------------|-----------------|
| | | | 5000K | A X B |
| THUNDERG3-100W | 100 | 6500K | 16500 | Ø270 X 75 |
| THUNDERG3-150W | 150 | | 24750 | Ø270 X 75 |

*Lumen output with ±10% tolerance.



DIMENSIONS

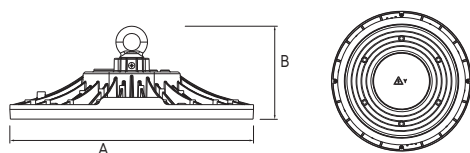

ACCESSORIES

