


KINETIC ADJUSTABLE

220-240V
 RECESSED MOUNTED
 CRI > 80
 NON DIMMABLE +

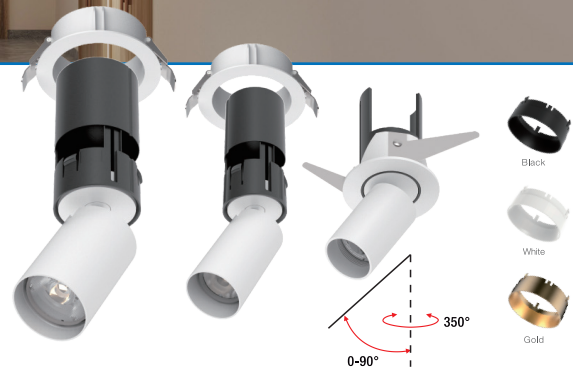

Features


- Miniature size with cutout of 46mm.
- Aluminium, powder coating
- SMD LED module with binning <3-step MacAdam.
- CRI > 80, CRI > 90
- Direct illumination
- Beam angle 13°, 15°, 18°, 24°, 25°, 30°, 36°, 55°
- 350° rotatable and 90° tiltable.
- High quality optical lens with spot, narrow and medium beam angles.
- Interchangeable decoration ring with choice of black, white and gold colors.

Applications

Extensive collection features minimalism, functionality and versatility. Flexible for lighting schemes in retail or residential spaces. Recessed or surface mounted light applications to meet multiple lighting requirements.

CODE	WATTS (W)	INPUT VOLTAGE	BEAM ANGLE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) 3000K / 4000K	DIMENSIONS (mm)	CUTOUT (mm)
K1X30-4W	4		15° / 30° / 55°			320 / 350	Ø30 X 72	Ø46
K1X55-9W	9	220 -240 VAC	18° / 24° / 36°	>0.9	2700K / 3000K / 4000K	720 / 800	Ø55 X 150	Ø80
K1X70-13W	13		13° / 25° / 30°			1200 / 1300	Ø72 X 165	Ø100

Dimensions

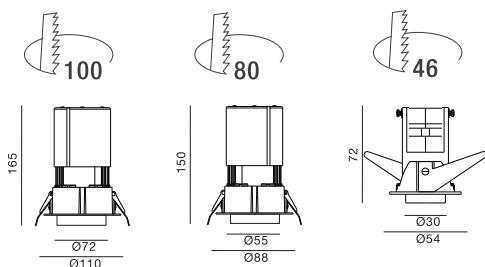

Photometrics

