




LUNA LED

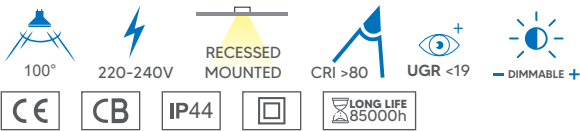

Features


- Thermal conductive plastic coated aluminum housing, V-0 flame rating.
- Driver builtin, integrated design.
- Punched in diffuser with UGR<19 Glare free optics.
- 3000K, 4000K, 6000K CCT for option.
- Lifetime @L70 85000hrs.
- More than 105lm/W lumen efficiency.
- Upto 3hrs battery backup system available upon request.

Applications

- General lighting of
- Offices
- Show rooms
- Retail outlets
- Healthcare facilities
- Recreational facilities
- Residential units

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm)	DIMENSIONS (mm)	CUTOUT (mm)
					3000K / 4000K / 6000K		
LUNA-7W	7	200 -240 VAC	>0.9	3000K / 4000K / 6000K	640 / 720 / 740	Ø92 X 63.5	Ø68 - 80
LUNA-10W	10				910 / 1020 / 1050	Ø113 X 72.5	Ø90 - 102
LUNA-14W	14				1270 / 1370 / 1470	Ø145 X 75	Ø120 - 130
LUNA-17W	17				1550 / 1670 / 1790	Ø174 X 78.5	Ø145 - 155
LUNA-20W	20				1960 / 2060 / 2100	Ø244 X 94.5	Ø195 - 210
LUNA-25W	25				2350 / 2550 / 2630	Ø244 X 94.5	Ø195 - 210

Dimensions

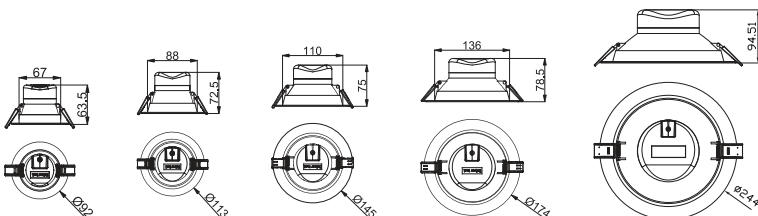

Photometrics

