



PHANTOM LED



36°
 220-240V
 RECESSED MOUNTED
 CRI > 80
 NON DIMMABLE +
 DIMMABLE UPON REQUEST +

Features


- 36° beam angle, with 30° adjustable tilt angle.
- Thermal conductive plastic coated aluminum housing, V-0 flame rating.
- 220-240VAC integral driver.
- Non dimmable/Triac dimmable available upon request.
- 3000K, 4000K, 6000K for option.
- Lifetime L70: >50000hrs.
- SDCM<5, good color consistency.

Applications

A low maintenance spot light solution that is ideal for residential apartments, foyers, retail outlets, restaurants and commercial buildings where an energy efficient and reliable lamp performance is essential.

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) 3000K / 4000K / 6000K	DIMENSIONS (mm)	CUTOUT (mm)
PHANTOM7W	7	220 -240 VAC	>0.9	3000K / 4000K /	590 / 650 / 700	Ø85 x 56	Ø68-75
PHANTOM10W	10			6000K	950 / 1000 / 1100	Ø105 x 71	Ø83-95

Dimensions

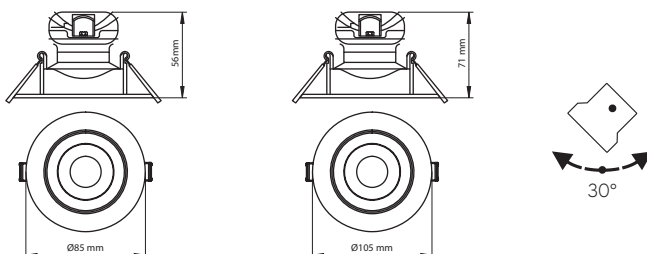

Photometrics

