




PHANTOM LED GEN-2

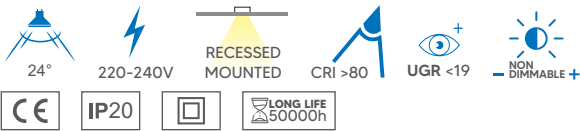

Features

- Deep reflector with Anti-glare, UGR<19 optics.
- 24° beam angle with 30° adjustable tilt angle.
- 220-240VAC integral driver.
- Thermal conductive plastic coated aluminum housing.
- LED SDCM<3, excellent color consistency.
- High efficiency more then 100lm/W LED chip.

Applications

A low maintenance spot light solution that is ideal for residential apartments, foyers, retail outlets, restaurants and commercial buildings where an energy efficient and reliable lamp performance is essential.

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) 3000K / 4000K / 6000K	DIMENSIONS (mm)	CUTOUT (mm)
PHANTOMG2-7W	7	220 -240 VAC	>0.9	3000K /	650 / 720 / 780	Ø90 X 43	Ø68-80
PHANTOMG2-10W	10			4000K / 6000K			

Dimensions

