


SIGMA LED

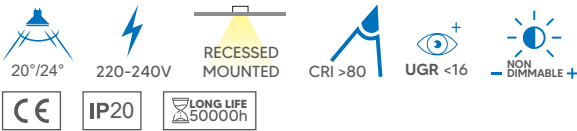

Features


- Recessed mounting sleek and stylish compact housing
- High performance internal Aluminum reflectors for maximum light output
- Internal PC lens offering precise beam for outstanding spotlight effect
- Integrated die-cast Aluminum heat sink for excellent heat dissipation
- High brightness COB LED with efficiency more than >95lm/W, offering excellent lighting performance.
- Glare free UGR < 16
- Flicker free external constant current power supply.
- RoHS complied environmental friendly without Hg, Pb or other hazardous material

Applications

- Commercial buildings and offices
- Residential units
- Hotels, restaurants and resorts
- health care facilities for general/ spot light effects
- showrooms
- museums and exhibition centers

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm)	DIMENSIONS (mm)	CUTOUT (mm)
					3000K / 4000K / 6000K		
CLS-SIGMA-4W	4	220 -240 VAC	>0.9	3000K / 4000K / 6000K	300 / 380 / 420	Ø72 X 60	Ø55
CLS-SIGMA-7W	7				630 / 665 / 700	Ø90 X 60	Ø75
CLS-SIGMA-14W	14				1260 / 1330 / 1400	Ø109 X 80	Ø95
CLS-SIGMA-20W	20				1800 / 1900 / 2000	Ø138 X 90	Ø120
CLS-SIGMA-30W	30				2700 / 2850 / 3000	Ø160 X 105	Ø150

Dimensions

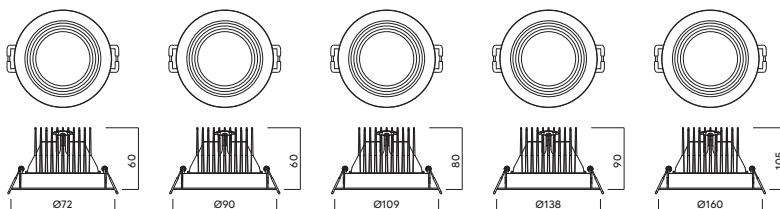

Photometrics

