




SPLINTER GEN-2 COLOR SELECT

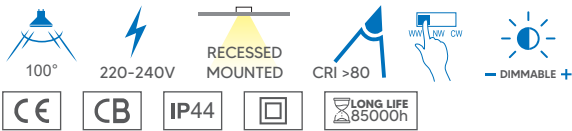

Features


- Thermal conductive plastic coated Aluminum housing and profile for good heat dissipation.
- V-0 Flame Rating.
- Smooth white aesthetically pleasing profile.
- Light weight easy to handle installation mechanism.
- Pre settable Tri-white color select switch offers liberty to choose 3000K, 4000K and 6000K CCT options.
- Triac dimmable integral LED driver.
- SDCM<5 good color consistency.
- Higher lumen efficiency of upto 105lm/W.
- Upto 3 Hours battery backup system available upon request.

Applications

- General lighting of
- Residential units
 - Apartment buildings
 - Lobbies
 - Foyers
 - Retail outlets
 - Restaurants
 - Office and commercial buildings
 - Health care and recreational units

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) 3000K / 4000K / 6000K	DIMENSIONS (mm)	CUTOUT (mm)
SPLINTERG2CS-9W	9	220 -240 VAC	>0.9	3000K / 4000K / 6000K	850 / 950 / 1000	Ø113 X 59	Ø90-102
SPLINTERG2CS-14W	14				1330 / 1400 / 1480	Ø145 X 65.8	Ø120-130
SPLINTERG2CS-25W	25				2430 / 2550 / 2660	Ø244 X 84	Ø195-210

Dimensions

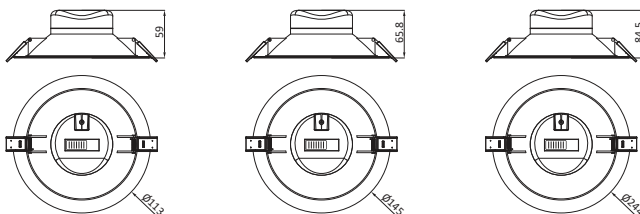

Photometrics

