



STARFLOOD GEN-2 LED FLOOD LIGHT



Features


- Aluminum alloy housing with black powder coated external finish.
- Tempered glass front with PC lens.
- Multiple Light distribution options.
- 135lm/W, 50000 hours highly efficient LED chips.
- External vent for avoiding internal fogging and frosting.
- Wire guard option for extra protection.
- 6kV line to line, 10kV line to earth surge protection.
- Suitable for extremely hot and cold climate with operating temperature range of 30°C to 50°C.
- LED life time >50000 hrs (@L70 ta -30°C).
- Non Dimmable , Dimmable and DALI control options available.
- Protection Rating IP66/IK08.
- CRI>80 standard, CRI>90 available upon request.

Applications

- For recreational sports (tennis courts, basketball courts...)
- For Billboard lighting (Tall-type billboard, wide-type billboard)
- Exhibition Center
- Shopping Mall
- Open yards and docks
- Building facades and accent lighting
- Parking lots

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) 3000K / 4000K / 5000K	DIMENSIONS (mm)
STARFLG2-50W	50	100-240 VAC	>0.9	3000K / 4000K / 5000K	6500 / 6750 / 7000	302 X 240 X 63
STARFLG2-100W	100				13000 / 13500 / 14000	390 X 334 X 76
STARFLG2-150W	150				19500 / 20250 / 21000	433 X 330 X 76
STARFLG2-200W	200				26000 / 27000 / 28000	470 X 395 X 86
STARFLG2-300W	300				39000 / 40500 / 42000	537 X 464 X 96

Dimensions

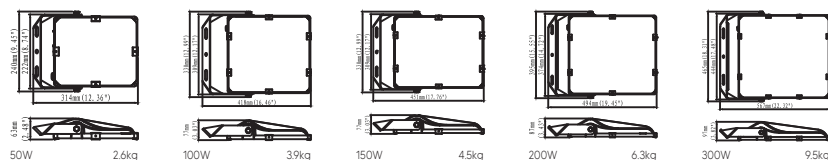

Photometrics

