

STREET MASTER



INPUT  100-277V


CRI > 80

Life 50000 h

IP 66

Features

- Die cast aluminum housing.
- Impact resistant PC lens.
- 125lm/W 3030 SMD LED chip, can be upgraded to >150lm/W SMD chip module by simple replacement.
- Smooth outer surface with easy to maintain driver compartment.
- Independant power supply compartment.
- 10kV SPD built in, 20kV SPD available upon request.
- IP66 protection rating from all sides, IK08.
- 60mm/ 76mm Spigot.
- Type II/ Type III light distribution optics.
- Analog dimmable option available upon request.
- Photocell with wide range of control options available upon request.
- Electrical 100-277 VAC PF>0.95.
- Operating temperature -40°C to 45°C.
- CE, CB, RoHS complied.

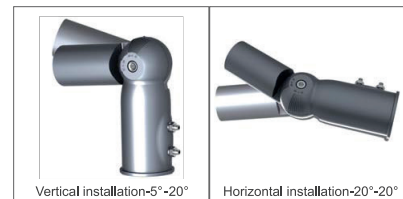

CODE	WATTS (W)	INPUT VOLTAGE	COLOR TEMPERATURE	LUMENS (lm) @4000K	DIMENSIONS (mm)	WEIGHT (kg)
CLS-SMRW-15W	15	100-277 VAC	3000K / 4000K / 5000K / 5700K / 6500K	1800	490 X 176 X 86	7.5
CLS-SMRW-20W	20			2400	490 X 176 X 86	7.5
CLS-SMRW-30W	30			3600	490 X 176 X 86	8.0
CLS-SMRW-40W	40			4800	490 X 176 X 86	8.0
CLS-SMRW-60W	60			7200	490 X 176 X 86	8.3
CLS-SMRW-70W	70			8400	715 X 270 X 94	8.3
CLS-SMRW-90W	90			10800	715 X 270 X 94	8.3
CLS-SMRW-100W	100			12000	715 X 270 X 94	8.3
CLS-SMRW-120W	120			14400	715 X 270 X 94	8.3
CLS-SMRW-150W	150			18000	715 X 270 X 94	8.3

