




UFO SURFACE DOWNLIGHT ROUND GEN-2

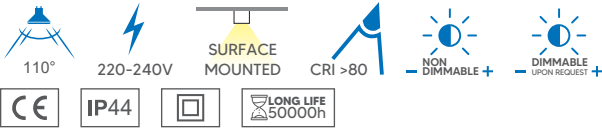

Features

- Extended range of UFO Surface Downlight with higher lumen efficiency.
- V-0 flame rated fixture housing made up of thermal conductive plastic ensuring safety reliability.
- Built-in Aluminium profile for good heat dissipation.
- High efficiency SMD 2835 LED chip.
- More than 95lm/W light output.
- Elegant design, easy to fix.
- Triac dimmable version available as an option.
- Working temperature: -20°C ~ 40°C.
- Built-in 220-240VAC driver.


Applications

More efficient surface downlight range for commercial, recreational and residential installations including

- Apartments
- Residential units
- Offices
- Shops
- Health care facilities
- Recreational facilities etc.

| CODE | WATTS (W) | INPUT VOLTAGE | POWER FACTOR | COLOR TEMPERATURE | LUMENS (lm) 3000K / 4000K / 6000K | DIMENSIONS (mm) |
|------------|-----------|---------------|--------------|--------------------------|--------------------------------------|-----------------|
| SMDLG2-6W | 6 | 220 -240 VAC | >0.9 | 3000K / 4000K / 6000K | 530 / 590 / 610 | Ø128 X 39 |
| SMDLG2-12W | 12 | | | | 1100 / 1150 / 1200 | Ø182 X 39 |
| SMDLG2-18W | 18 | | | | 1700 / 1780 / 1810 | Ø232 X 39 |
| SMDLG2-20W | 20 | | | | 1850 / 1920 / 2000 | Ø252 X 39 |

Dimensions

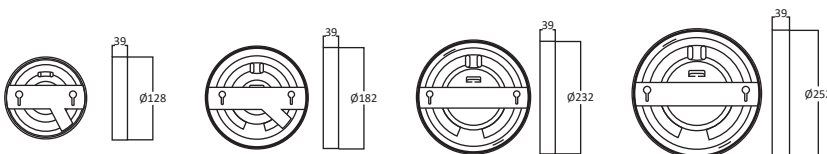

Photometrics

