


LED TRACK LIGHT
F7 SERIES

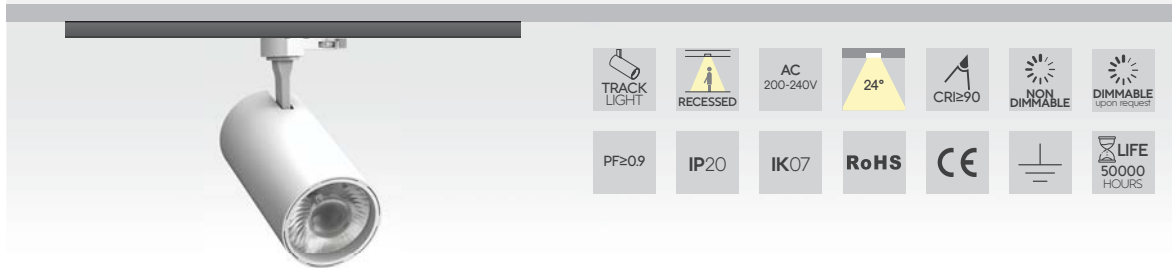

- TRACK LIGHT
- RECESSED
- AC 200-240V
- 24°
- CRI≥90
- NON DIMMABLE
- DIMMABLE upon request
- PF≥0.9
- IP20
- IK07
- RoHS
- CE
- LIFE 50000 HOURS

FEATURES

- High performance COB LED with lumen efficiency greater than 120lm/W.
- 0~350° horizontally rotatable, 0~90° vertically tiltable.
- High quality Die-cast aluminum heatsink ensures better heat dissipation.
- Built-in constant current LED driver, flicker free, PF>0.9.
- Non dimmable as standard, Triac Dimmable, 0/1-10V dimmable, DALI Dimmable driver available upon request.
- Standard Black and white aluminum outer finish.
- SDCM <3 Excellent color consistency.
- THD <15%.
- Single phase 3 wire track adapter as standard.
- Impact resistant PC lens cover.
- Protection rating IP20, IK07, Class I.

APPLICATIONS

- High quality track light solution ideal for
- Brand showrooms
- Exhibition halls
- Retail outlets
- Super markets
- Offices
- Foyers etc.


SPECIFICATIONS

CODE	WATTS (W)	CCT (K)	LUMENS (lm)* 3500K	DIMENSIONS (mm) A X B
CLS-TL-25W-F7	25	3500K	3200	Ø70 X 140

*Lumen output with ±10% tolerance.



DIMENSIONS



PHOTOMETRICS

