



## Eloe™ Senses Push Button


Cat. No(s): 6 180 10  
6 180 11/15 MY  
"MY" = Malaysia



6 180 10



6 180 11 MY



6 180 15 MY


### 1. USE

Mechanisms with or without marking for the control of bells, buzzers, room controller units and so on.  
(Supplied with M3.5 screws for Flush mounting or surface mounting BS boxes.)

### 2. RANGE

| Designation                       | White       |
|-----------------------------------|-------------|
| 1 GANG PUSH BUTTON 6A             | 6 180 10    |
| 1 GANG PUSH BUTTON + BELL SIGN 6A | 6 180 11 MY |
| 2 GANG PUSH BUTTON                | 6 180 15 MY |

### 3. DIMENSIONS (mm)

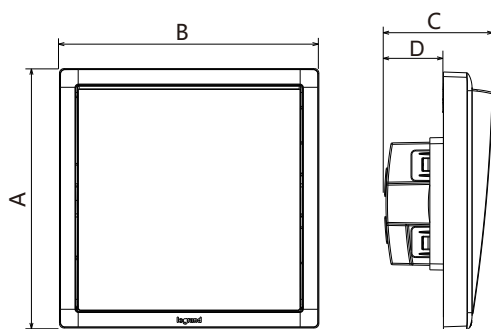

| References     | A  | B  | C    | D    |
|----------------|----|----|------|------|
| 6 180 10       | 86 | 86 | 35.8 | 19.5 |
| 6 180 11/15 MY | 86 | 86 | 35.8 | 19.5 |

Box depth  $\geq$  25 mm

### 4. CONNECTION

Types of terminals: with screws  
Terminal capacity: 3 X 1 mm<sup>2</sup>  
3 X 1.5 mm<sup>2</sup>  
2 X 2.5 mm<sup>2</sup>  
1 X 4 mm<sup>2</sup>

Recommended stripping length: 12 mm  
Recommended screwdriver size: <4 mm flat blade

### 5. TECHNICAL CHARACTERISTICS

#### 5.1 Material characteristics

Rocker: PC  
Frame: PC  
Base: PP  
Self-extinguishing:  
+ 850° C / 30 s for insulating parts holding live parts in place  
+ 650° C / 30 s for other parts made of insulating materials

#### 5.2 Electrical characteristics

Voltage: 250V~  
Current: 6A

#### 5.3 Climatic characteristics

Storage temperatures: -10°C to +70°C  
Operating temperatures: -5°C to +35°C

#### 5.4 Mechanical characteristics

Impact test: IK04  
Protection against solids & liquids: IP20

### 6. CLEANING

Surface cleaning with a soft, slightly damp cloth.  
Do not use: acetone, tar remover, trichloroethylene

### 7. CONFORMITY - APPROVALS

Conform to BS EN 60669-1.