


Obria™ Fan Control

Cat. No(s): MEC66014XX MY
"XX" = Color / finishes: WH SL CH BL RG
"MY" = Malaysia



MEC66014XX MY

1. USE

5 speed Fan Control.
(Supplied with M3.5 screws for Flush mounting or surface mounting BS boxes.)

2. RANGE


Designation	Cat. No.
FAN CONTROL 100VA/100W ROTARY SWITCH	MEC66014XX MY

Colours

-Matt colors finishes

WH: Matt White
SL: Dark silver
CH: Champagne
BL: Matt Black
RG: Rose gold

3. DIMENSIONS (mm)

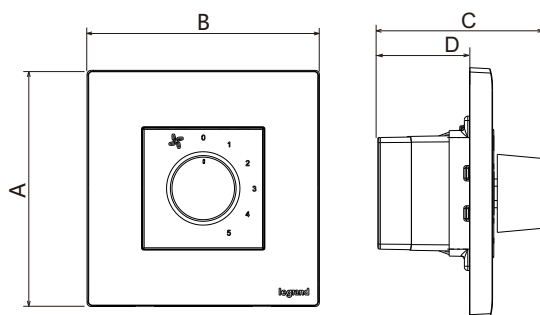

References	A	B	C	D
MEC66014XX MY	87.4	86	57.3	31.9

Minimum depth of the box > 35 mm

4. CONNECTION

4.1 Terminal

Types of terminals: with screws

Terminal capacity: 4 × 1 mm²
3 × 1.5 mm²
2 × 2.5 mm²
1 × 4 mm²

Recommended stripping length: 8 mm

Recommended screwdriver size: 4 mm flat blade

5. TECHNICAL CHARACTERISTICS

5.1 Material characteristics

Button: PC
Plate: PC
Frame: PC
Base: PC
Self-extinguishing:
+ 850°C / 30 s for insulating parts holding live parts in place
+ 650°C / 30 s for other parts made of insulating materials

5.2 Electrical characteristics

Voltage: 200 - 240V~
Frequency: 50/60Hz
Min: 100VA/100W

5.3 Climatic characteristics

Storage temperatures: -10°C to +70°C
Operating temperatures: -5°C to +35°C

5.4 Mechanical characteristics

Impact test: IK04
Protection against solids & liquids: IP20

6. CLEANING

Surface cleaning with a soft, slightly damp cloth.
Do not use: acetone, tar remover, trichloroethylene.

7. CONFORMITY - APPROVALS

Conform to BS EN 60669-2-1.