



FEATURES

- Low glare, recessed LED downlight range.
- Smooth finish with extremely thin outer frame.
- Thermal conductive .glass fiber polyamide coated aluminum housing.
- Single CCT or 3CCT for option.
- Lumens efficacy >100lm/W with white housing.
- Black housing option available upon request.
- Deep reflector ensuring UGR<16 glare free optics.
- Long life 50000 hrs @L70 SMD2835 LED chip.
- Built in integrated flicker free LED driver with Triac dimmable option available upon request.
- IP44 Class II protection rating

APPLICATIONS


- A low maintenance spot light solution ideal for
- Residential units
 - Foyers
 - Retail outlets
 - Restaurants
 - Commercial buildings

SPECIFICATIONS

CODE	WATTS (W)	CCT (K)	LUMENS (lm) 3000K/4000K/5700K	DIMENSIONS (mm) A X B	CUTOUT (mm)
MIRACLE-6W	6	3000K /	580 / 600 / 620	Ø81 X 79	Ø68 - 73
MIRACLE-9W	9	4000K /	870 / 900 / 930	Ø103 X 91	Ø90 - 95
MIRACLE-12W	12	5700K	1160 / 1200 / 1240	Ø140 X 102	Ø120 - 128



DIMENSIONS

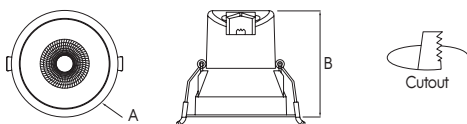

PHOTOMETRICS

