


STABIMATIC®



VANGUARD 3 PHASE

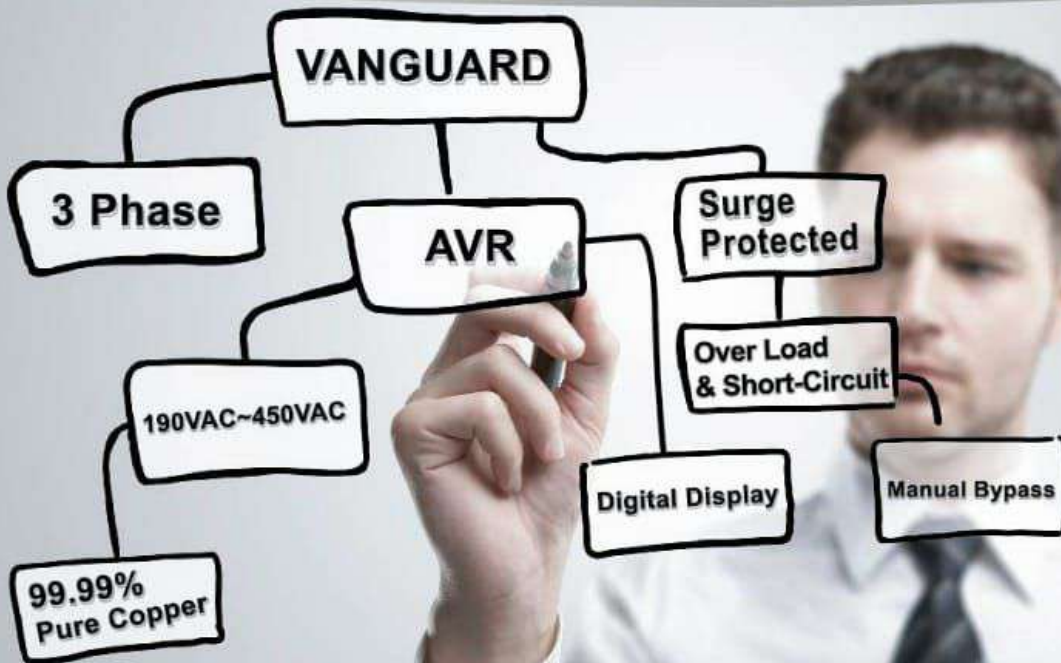

Digital Display
for each Phase

Surge Protected

3PHASE Input Range:
190VAC~450VAC



STABIMATIC Co.Ltd, UK

STABIMATIC®



3 PHASE

Features

- Digital Display: Input & Output Voltage / Current of each Phase.
- Display Load & Over Load.
- Voltage Tolerance -50% +20% (190VAC~450VAC)
- Pure 99.99% Copper Transformers in 3 Phase.
- independent 3 Servo Motor Controller
- 380VAC & 220VAC output available.
- Surge Protection.
- Short Circuit & No Phase Protected- Alarm when in Protection model.
- Beyond Voltage range Protected
- Manual Bypass

MODEL NO.	VANGUARD-10	VANGUARD-15	VANGUARD-20	VANGUARD-30	VANGUARD-45	VANGUARD-60
Product size (mm)	35x33x78	43x38x73	43x51x91	43x51x91	43x65x95	43x65x95
Package size (mm)	48*45*89	55*50*89	64*55*107	64*55*107	80*55*112	80*55*112
GROSS WEIGHT(KG)	53	71	95	111	185	208
NET WEIGHT (KG)	42	60	80	96	162	185
INPUT VOLTAGE	190-450V (3PH)					
OUTPUT VOLTAGE	380V (3PH)					
OVER VOLT PROTECTION	Phase volt output >246 +/- 4V					
UNDER VOLT PROTECTION	Phase volt output <184 +/- 4V					

