



FEATURES

- Unique design with big beam angle and perfect light distribution.
- 1.5mm thickness of Aluminum keeps the temperature low and good for heat dissipation.
- upto 1.5kV built In surge protection on driver.
- Fully opaque smooth PMMA diffuser with no LED's visible.
- Certified LED chip with >100lm/W efficiency.
- CRI>80 good color rendering.
- Can be connected seamlessly, providing perfect cove / indirect linear lighting solution.

APPLICATIONS

- General light solution ideal for
- Residential units
 - Retail Outlets
 - Super Markets
 - Offices
 - Corridors
 - Stair case
 - Cove/indirect lighting


SPECIFICATIONS

CODE	WATTS (W)	CCT (K)	LUMENS (lm)*	DIMENSIONS (mm)
			3000K / 4000K/5000K	A X B X C
T5PRO-10W	10	3000K / 4000K /	950 / 1000 / 1080	1150 X 30.2 X 21.2
T5PRO-18W	18	5000K	1730 / 1800 / 1900	1150 X 30.2 X 21.2

*Lumen output with ±10% tolerance.



DIMENSIONS

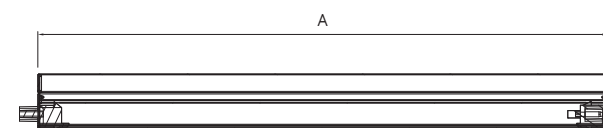

PHOTOMETRICS

