


DS-7108NI-E1/V/W/1T

WiFi Router NVR

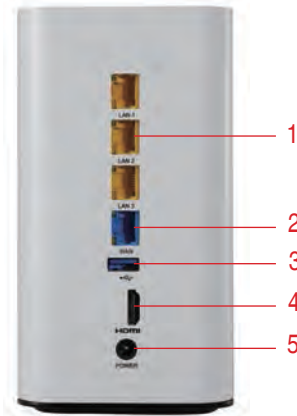

1. LAN Interface (1 to 3)
2. WAN Interface
3. USB Interface
4. HDMI
5. POWER

Key Features

- Automatic Detection and Connection of IP Cameras without Any Manual Operation
- Up to 6 Megapixels Resolution Recording
- HDMI Output at Up to 1920 × 1080p Resolution
- Supports WPS (WiFi Protected Setup)
- Built-In Silent Fan with Automatic Speed Adjustment
- 802.11 b/g/n with a Built-In Dual WiFi Antenna for a Strong Wireless Network Signal

Order Model

DS-7108NI-E1/V/W/1T

DS-7108NI-E1/V/W/1T	
Video/Audio Input	
IP Video Input	8-ch
Video Compression	H.264, MPEG4
Protocol	HIKVISION, ACTI, ARECONT, AXIS, BOSCH, BRICKCOM, CANON, HUNT, ONVIF (version 2.4), PANASONIC, PELCO, PSIA, RTSP, SAMSUNG, SANYO, SONY, VIVOTEK, ZAVIO
Network	
Incoming Bandwidth	50 Mbps
Outgoing Bandwidth	80 Mbps
Protocol	IPv6, UpnP, SNMP, NTP, SADP, DDNS, SMTP, NFS, iSCSI
Video/Audio Output	
Recording Resolution	6 MP/5 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
HDMI Output (with audio output)	1-ch, resolution: 1920 × 1080p/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
Playback Resolution	6 MP/5 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	8-ch
Record	
Record Type	Manual, continuous, motion detection, alarm, motion detection and alarm, motion detection alarm, VCA
Playback Type	Instant playback, normal playback, event playback, tag playback, log playback, Smart playback, external file playback
Backup Mode	Normal, event
Hard Disk	
SATA	12 VDC
Capacity	2.5-inch, 1 TB factory installed
External Interface	
Network Interface	1 RJ-45 10/100 Mbps WAN interface; 3 RJ-45 10/100M LAN interfaces
USB Interface	1 × USB 3.0
Wireless	
Frequency Band	2.4 GHz
Antenna Structure	2 × 2 MIMO (internal)
Transmission Rate	300 Mbps
Transmission Standard	IEEE 802.11b/g/n
Others	
Power Supply	12 VDC
Consumption	≤ 12 W
Working Temperature	0° C to +40° C (+32° F to +104° F)
Working Humidity	10 % to 90 %
Dimensions (W × D × H)	87 mm × 87 mm × 157 mm (3.4" × 3.4" × 6.2")
Weight	≤ 0.53 Kg (1.2 lb)